


SOT-89 Plastic-Encapsulate Transistors

Features

- Collector Current Capability $I_C=-0.2A$
- Collector Emitter Voltage $V_{CEO}=-40V$
- Compliment to PXT3904
- PNP Transistors

MECHANICAL DATA

- Case style:SOT-89molded plastic
- Mounting position:any

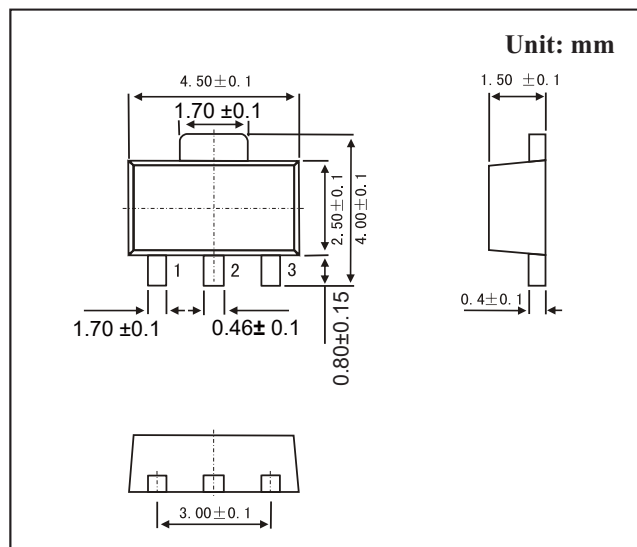

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CBO}	-40	V
Collector - Emitter Voltage	V_{CEO}	-40	
Emitter - Base Voltage	V_{EBO}	-6	
Collector Current - Continuous	I_C	-0.2	A
Collector Power Dissipation	P_C	0.5	W
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{stg}	-55 to 150	

PACKAGE INFORMATION

Device	Package	Shipping
PXT3906 (KXT3906)	SOT-89	1000/Tape&Reel


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V_{CBO}	$I_C=-100\mu A, I_E=0$	-40			V
Collector- emitter breakdown voltage	V_{CEO}	$I_C=-1mA, I_B=0$	-40			
Emitter - base breakdown voltage	V_{EBO}	$I_E=-100\mu A, I_C=0$	-6			
Collector-base cut-off current	I_{CBO}	$V_{CB}=-30V, I_E=0$			-50	nA
Collector- emitter cut-off current	I_{CEX}	$V_{CE}=-30V, V_{BE(off)}=-3V$			-50	
Emitter cut-off current	I_{EBO}	$V_{EB}=-6V, I_C=0$			-50	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=-10mA, I_B=-1mA$			-0.25	V
		$I_C=-50mA, I_B=-5mA$			-0.4	
		$I_C=-10mA, I_B=-1mA$	-0.65		-0.85	
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_C=-50mA, I_B=-5mA$			-0.95	
DC current gain	h_{FE}	$V_{CE}=-1V, I_C=-0.1mA$	60			
		$V_{CE}=-1V, I_C=-1mA$	80			
		$V_{CE}=-1V, I_C=-10mA$	100		300	
		$V_{CE}=-1V, I_C=-50mA$	60			
		$V_{CE}=-1V, I_C=-100mA$	30			
Noise figure	NF	$V_{CE}=-5V, I_C=-0.1mA, f=10Hz-15.7kHz, R_s=1K\Omega$			4	dB
Delay time	t_d	$I_C=-10mA, I_{B1}=-I_{B2}=-1mA$			35	ns
Rise time	t_r				35	
Storage time	t_s				225	
Fall time	t_f				75	
Collector output capacitance	C_{ob}	$V_{CB}=-5V, I_E=0, f=1MHz$			4.5	pF
Emitter capacitance	C_e	$V_{EB}=-0.5V, I_C=0, f=1MHz$			10	
Transition frequency	f_T	$V_{CE}=-20V, I_C=-10mA, f=100MHz$	250			MHz

■ Marking


Marking	2A
---------	----

RATINGS AND CHARACTERISTIC CURVES


Static Characteristic

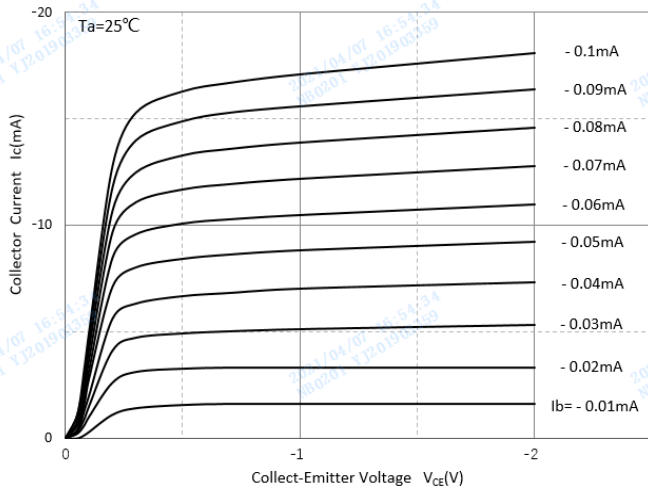


DC Current Gain

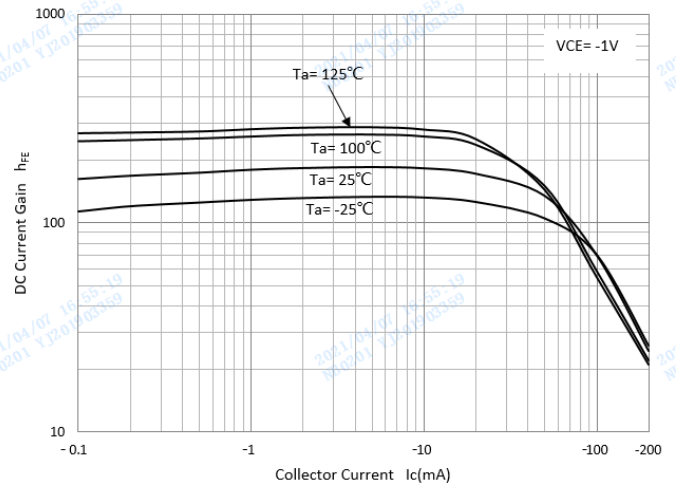


Collector-Emittor Saturation Voltage

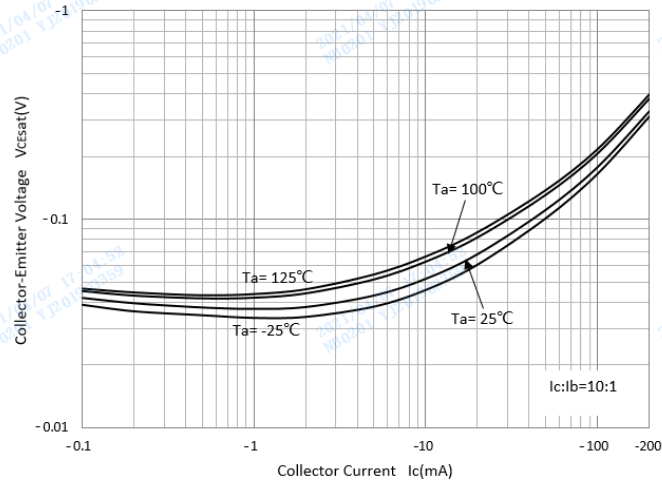

Base-Emittor Saturation Voltage

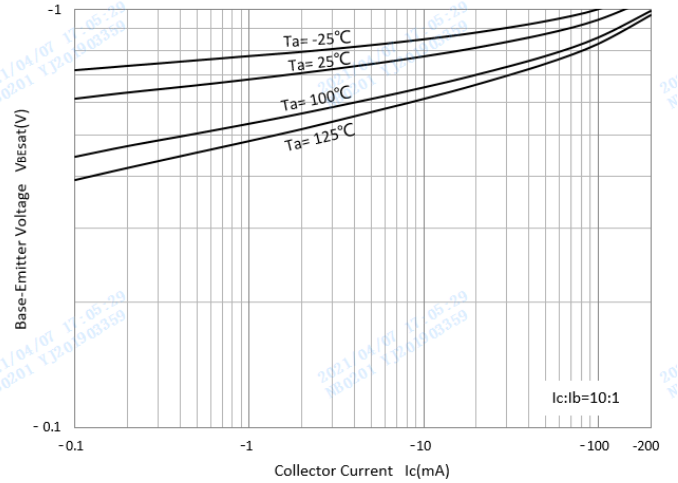

Base-Emittor On Voltage

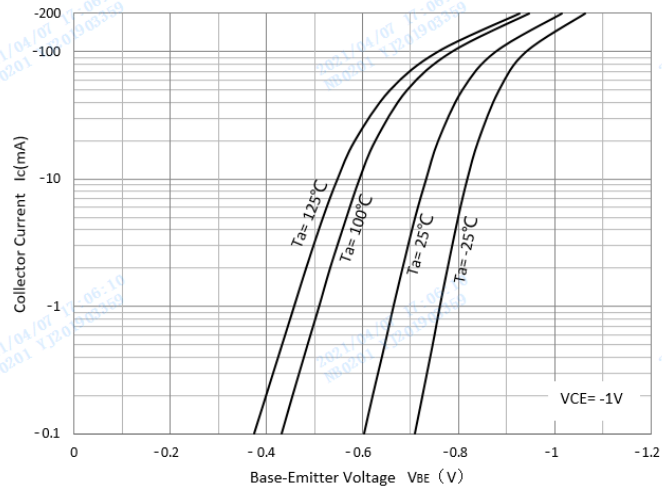

$C_{ob}/C_{ib}-V_{CB}/V_{EB}$

