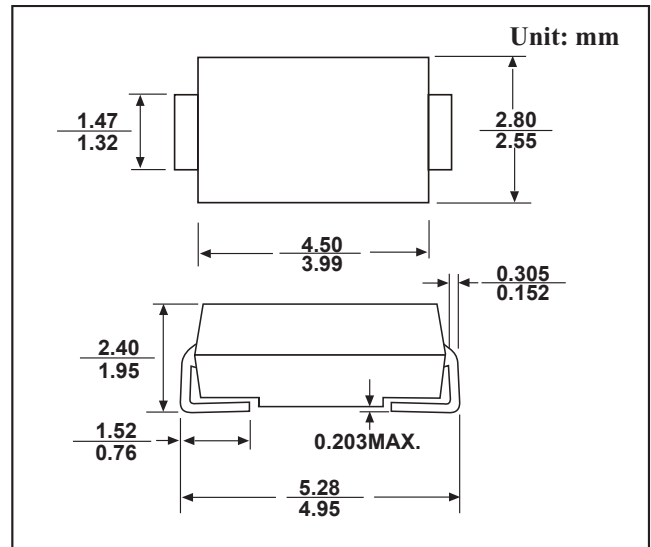


SMA SCHOTTKY BARRIER DIODE
FEATURES

- The plastic package carries Underwrites Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- High reliability
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals
- Component in accordance to RoHs 2015/863 and WEEE 2012/19/EU

MECHANICAL DATA

- Case style: SMA molded plastic
- Mounting position: Any


MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	SYMBOLS	SS5817	SS5818	SS5819	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	VOLTS
Maximum RMS voltage	V_{RMS}	14	21	28	VOLTS
Maximum DC blocking voltage	V_{DC}	20	30	40	VOLTS
Maximum average forward rectified current 0.375"(9.5mm) lead length at $T_L=90^\circ\text{C}$	$I_{(AV)}$	1.0			Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25.0			Amps
Maximum instantaneous forward voltage at 1.0A	V_F	0.450	0.550		Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	1.0 10.0			mA
Typical junction capacitance	C_J	110.0			pF
Typical thermal resistance	R_{qJA}	50.0			$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +125			$^\circ\text{C}$

RATINGS AND CHARACTERISTIC CURVES

FIG. 1- FORWARD CURRENT DERATING CURVE

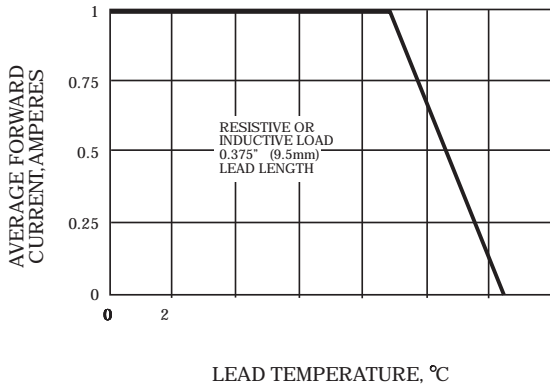


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

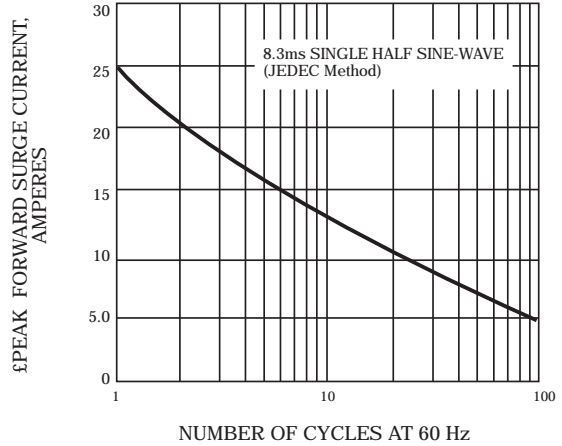


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

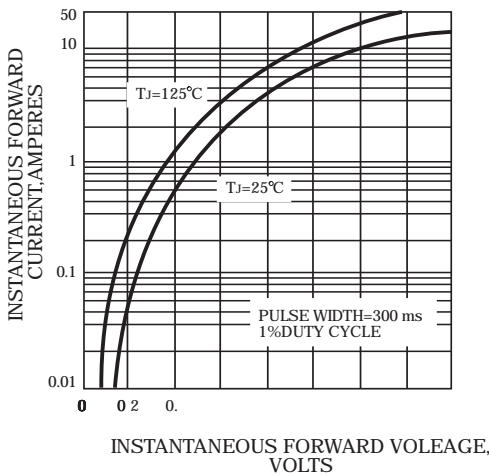


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

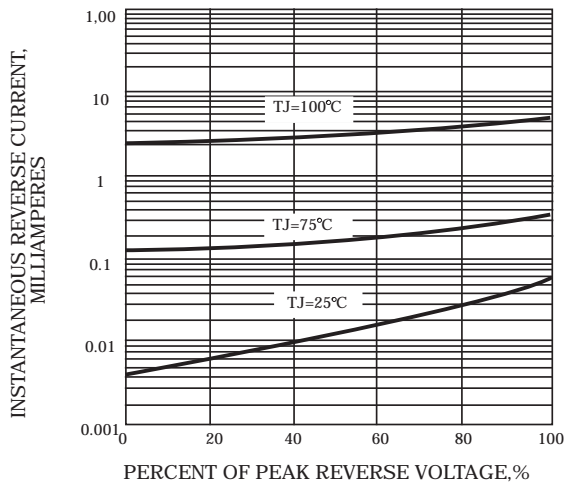


FIG. 5-TYPICAL JUNCTION CAPACITANCE

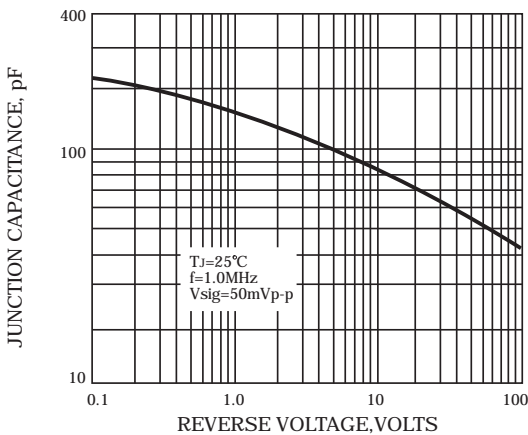


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

